

Stainless Steel Series 330LXZ, Wheel



max 100 kg -20 °C - +60 °C 100-125 mm

swivels easily

wear resistant

shock proof

floor protective

weather proof

Material



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Material Fork



Stainless steel swivel fork with single bolt hole, large double ball bearing – Ø 57 mm, revited, wheel axle bolted and locked, total lock

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance


Applications

- Food & dish carts
- Food service carts
- Food & dish carts
- Food service carts
- Wet environments
- Health-Professionals

ROLLENBAU



SWIVEL CASTOR

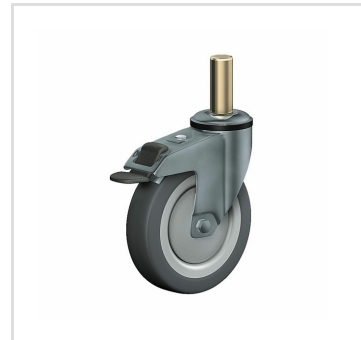

SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	STERN MM	TRANSVERSE BORE MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
330LX Z18 102 TPKX	Swivel castor	100x32	90	132	18x62	M6 auf 19	90		93,00
331LX Z18 102 TPKX	Swivel castor with total lock	100x32	90	132	18x62	M6 auf 19	130		112,44
330LX Z18 102 TP	Swivel castor	100x32	90	132	18x62	M6 auf 19	90		84,72
331LX Z18 102 TP	Swivel castor with total lock	100x32	90	132	18x62	M6 auf 19	130		102,36
330LX Z18 127 TPKX	Swivel castor	125x32	100	158	18x62	M6 auf 19	103		99,24
331LX Z18 127 TPKX	Swivel castor with total lock	125x32	100	158	18x62	M6 auf 19	130		118,68
330LX Z18 127 TP	Swivel castor	125x32	100	158	18x62	M6 auf 19	103		91,44
331LX Z18 127 TP	Swivel castor with total lock	125x32	100	158	18x62	M6 auf 19	130		109,44