

Transport Series 2SL, Wheel Z



max 160 kg -20 °C - +80 °C 50-50 mm


+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

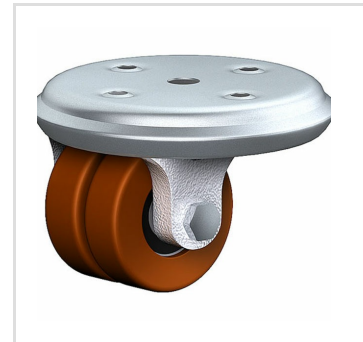

WHEEL VKRK

Material



Tread: Cast polyurethane, 95±3 Shore A
Wheel centre, Cast-iron - painted

Material Fork



Twin wheel castor steel zinc coated
and grey cast iron, ball bearing

Advantages

- ✓ high load capacity with small overall height
- ✓ easy running due to a large swivel bearing
- ✓ geräuscharmer Lauf
- ✓ geringer Rollwiderstand
- ✓ abrieb- und reißfest
- ✓ hohe Stoßfestigkeit
- ✓ sehr beständig gegen viele aggressive Medien

Applications

- Metal-Technology
- Workshops
- Carpentry
- Building-Industry

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
2SL 50 Z	Swivel castor	50x14+14	160	64	95	36x36	6,8	52	==	70,68