

Transport Series CD, Wheel ELPG ⚡

ROLLENBAU

max 300 kg $-10^{\circ}\text{C} - +60^{\circ}\text{C}$ 125-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Elastic solid rubber tyre 70 ± 5 Shore A electrically conductive
volume resistance value $<10^4\Omega$
High quality nylon wheel centre electrically conductive
volume resistance value $<10^4\Omega$

Material Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened
steel balls thermoplastic dust protection ring, wheel axle bolted,
total lock

Advantages

- ✓ electrically conductive
- ✓ excellent running performance
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ korrosionsbeständig
- ✓ non-marking

Applications

- Diagnostic equipment
- Automobile test equipment

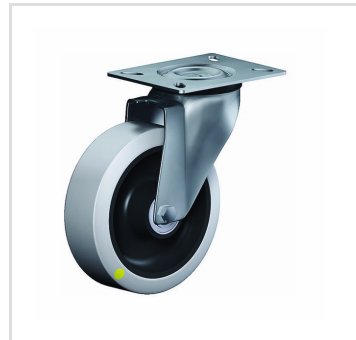

SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK



FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
CS 125 ELPGB	Swivel castor	125x40	170	160	102x83	80x60	9	113		81,36
CST 125 ELPGB	Swivel castor with total lock	125x40	170	160	102x83	80x60	9	140		93,36
CSF 125 ELPGB	Fixed castor	125x40	170	160	102x83	80x60	9			71,88
CSS 125 ELPGB	Swivel castor	125x40	200	163	135x110	105x80	11	113		85,44
CSST 125 ELPGB	Swivel castor with total lock	125x40	200	163	135x110	105x80	11	140		97,56
CSSF 125 ELPGB	Fixed castor	125x40	200	163	135x110	105x80	11			69,72
CS 160 ELPGK	Swivel castor	160x45	300	199	135x110	105x80	11	138		126,00
CST 160 ELPGK	Swivel castor with total lock	160x45	300	199	135x110	105x80	11	168		147,48
CSF 160 ELPGK	Fixed castor	160x45	300	199	135x110	105x80	11			104,52
CD 200 ELPGK	Swivel castor	200x50	300	249	135x110	105x80	11	161		160,44
CDT 200 ELPGK	Swivel castor with total lock	200x50	300	249	135x110	105x80	11	168		178,32
CDF 200 ELPGK	Fixed castor	200x50	300	249	135x110	105x80	11			149,40