


Transport Series CR, Wheel PS



max 300 kg -30 °C - +80 °C 100-200 mm

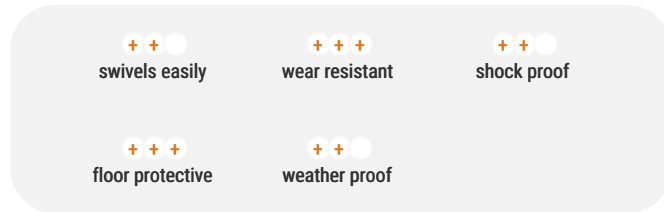

Material



Cast soft polyurethane coating,
87±3 Shore A
High quality nylon wheel centre

Material Fork



Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Metal-Technology
- Workshops
- Carpentry
- Building-Industry



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
CRS 100 PSK	Swivel castor	100x40	200	129	12,5	98		68,16
CRST 100 PSK	Swivel castor with total lock	100x40	200	129	12,5	140		87,72
CRS 100 PSB	Swivel castor	100x40	200	129	12,5	98		57,72
CRST 100 PSB	Swivel castor with total lock	100x40	200	129	12,5	140		79,44
CRS 125 PSK	Swivel castor	125x40	200	160	12,5	113		85,80
CRST 125 PSK	Swivel castor with total lock	125x40	200	160	12,5	140		98,28
CRS 125 PSB	Swivel castor	125x35	200	160	12,5	113		70,68
CRST 125 PSB	Swivel castor with total lock	125x35	200	160	12,5	140		89,88
CR 150 PSK	Swivel castor	150x40	200	181	12,5	128		90,24
CRT 150 PSK	Swivel castor with total lock	150x40	200	181	12,5	140		110,04
CR 150 PSB	Swivel castor	150x40	200	181	12,5	128		81,24
CRT 150 PSB	Swivel castor with total lock	150x40	200	181	12,5	140		100,92
CR 200 PSK	Swivel castor	200x50	300	240	12,5	161		143,52
CRT 200 PSK	Swivel castor with total lock	200x50	300	240	12,5	168		166,08
CR 200 PSB	Swivel castor	200x50	300	240	12,5	161		133,08
CRT 200 PSB	Swivel castor with total lock	200x50	300	240	12,5	168		156,00