


Transport Series CR, Wheel TLS



max 300 kg -20 °C - +80 °C 125-200 mm

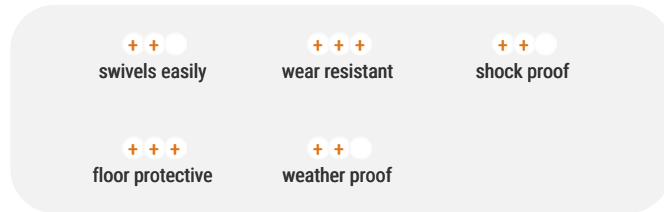

Material



Tread: cast polyurethane, 70±3 Shore A
Core: Die-cast aluminium alloy

Material Fork




Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Metal-Technology
- Workshops
- Dollies
- Carpentry
- Building-Industry

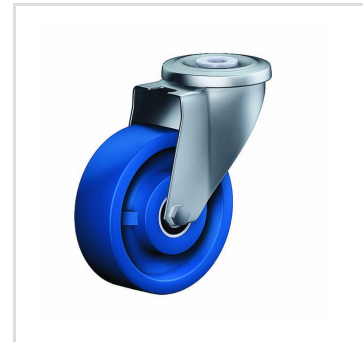

SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
CRS 125 TLSK	Swivel castor	125x50	200	160	12,5	114		84,12
CRST 125 TLSK	Swivel castor with total lock	125x50	200	160	12,5	140		114,72
CRS 150 TLSK	Swivel castor	150x50	200	191	12,5	133		114,72
CRST 150 TLSK	Swivel castor with total lock	150x50	200	191	12,5	168		135,72
CR 200 TLSK	Swivel castor	200x50	300	240	12,5	161		168,60
CRT 200 TLSK	Swivel castor with total lock	200x50	300	240	12,5	168		181,08