


Transport Series CR, Wheel P



max 300 kg -30 °C - +80 °C 60-200 mm

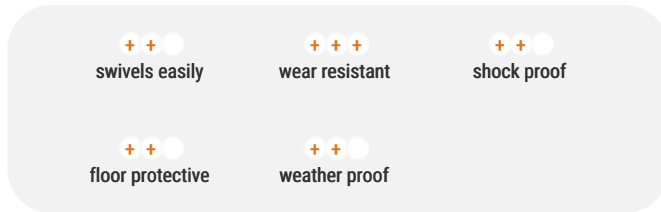

Material



Casted high quality nylon wheel

Material Fork



Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Advantages

- ✓ easy running on smooth floors
- ✓ impact proof
- ✓ high abrasion resistance
- ✓ easy to clean
- ✓ high chemical resistance

Applications

- Metal-Technology
- Tyre racks
- Workshops
- Carpentry
- Building-Industry



SWIVEL CASTOR



SWIVEL CASTOR WITH TOTAL LOCK

Dimensions

ARTICLE NUMBER	ARTICLE TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
CR 60 P	Swivel castor	60x30	150	81	12,5	62		27,96
CR 80 PK	Swivel castor	80x30	120	106	12,5	75		48,72
CRT 80 PK	Swivel castor with total lock	80x30	120	106	12,5	108		62,52
CR 80 PB	Swivel castor	80x30	120	106	12,5	75		28,44
CRT 80 PB	Swivel castor with total lock	80x30	120	106	12,5	108		43,56
CR 80 P	Swivel castor	80x30	120	106	12,5	75		21,96
CRT 80 P	Swivel castor with total lock	80x30	120	106	12,5	108		36,72
CR 100 PK	Swivel castor	100x30	120	128	12,5	88		51,12
CRT 100 PK	Swivel castor with total lock	100x30	120	128	12,5	108		65,76
CR 100 PB	Swivel castor	100x30	120	128	12,5	88		31,32
CRT 100 PB	Swivel castor with total lock	100x30	120	128	12,5	108		45,12
CR 100 PL	Swivel castor	100x30	120	128	12,5	88		24,12
CRT 100 PL	Swivel castor with total lock	100x30	120	128	12,5	108		38,88
CRS 125 PK	Swivel castor	125x40	200	160	12,5	113		69,72
CRST 125 PK	Swivel castor with total lock	125x40	200	160	12,5	140		86,04
CR 125 PLLB	Swivel castor	125x40	120	154	12,5	104		40,32
CRT 125 PLLB	Swivel castor with total lock	125x40	120	154	12,5	108		54,72
CRS 125 PB	Swivel castor	125x40	200	160	12,5	113		48,72
CRST 125 PB	Swivel castor with total lock	125x40	200	160	12,5	140		64,92
CR 125 PL	Swivel castor	125x35	120	154	12,5	104		36,84
CRT 125 PL	Swivel castor with total lock	125x35	120	154	12,5	108		51,72
CRS 125 PL	Swivel castor	125x35	170	160	12,5	113		39,96
CRST 125 PL	Swivel castor with total lock	125x35	170	160	12,5	140		56,04
CR 150 PK	Swivel castor	150x40	200	181	12,5	128		79,44
CRT 150 PK	Swivel castor with total lock	150x40	200	181	12,5	140		96,24
CR 150 PB	Swivel castor	150x40	200	181	12,5	128		52,80
CRT 150 PB	Swivel castor with total lock	150x40	200	181	12,5	140		69,72
CR 150 PL	Swivel castor	150x40	200	181	12,5	128		44,88
CRT 150 PL	Swivel castor with total lock	150x40	200	181	12,5	140		61,44
CR 175 PK	Swivel castor	175x50	300	216	12,5	147		100,56
CRT 175 PK	Swivel castor with total lock	175x50	300	216	12,5	168		121,92
CR 175 PB	Swivel castor	175x50	300	216	12,5	147		79,32

CRT 175 PB	Swivel castor with total lock	175x50	300	216	12,5	168		99,96
CR 175 P	Swivel castor	175x50	300	216	12,5	147		66,84
CRT 175 P	Swivel castor with total lock	175x50	300	216	12,5	168		88,08
CR 200 PLK	Swivel castor	200x50	300	240	12,5	161		105,96
CRT 200 PLK	Swivel castor with total lock	200x50	300	240	12,5	168		126,84
CR 200 PLB	Swivel castor	200x50	300	240	12,5	161		86,52
CRT 200 PLB	Swivel castor with total lock	200x50	300	240	12,5	168		106,92
CR 200 P	Swivel castor	200x50	300	240	12,5	161		73,92
CRT 200 P	Swivel castor with total lock	200x50	300	240	12,5	168		95,04