


Transport Series CR, Wheel Z



max 150 kg -30 °C - +80 °C 35-60 mm

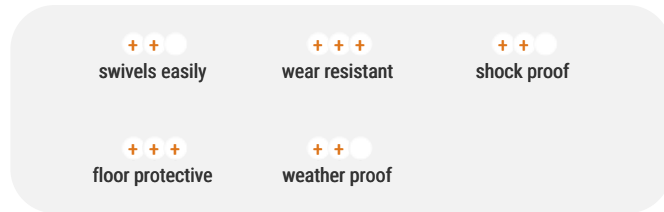

SWIVEL CASTOR

Material

Cast polyurethane coating, 95±3 Shore A

Steel wheel centre

Material Fork



Medium duty bolt hole castor,
finish: electro-zinc plated, swivel fork with single bolt hole, double
ball bearing - revited,
hardened steel balls, wheel axle bolted, total lock

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ high chemical resistance

Applications

- Metal-Technology
- Tyre racks
- Workshops
- Carpentry
- Building-Industry

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
CR 35 ZK	Swivel castor	35x27	100	58	10	34		23,76
CR 60 ZK	Swivel castor	60x30	150	89	12,5	76		40,44
CRT 60 ZK	Swivel castor with total lock	60x30	150	89	12,5	115		48,72