

Transport Series KD, Wheel TLSBA



max 450 kg -20 °C - +80 °C 125-200 mm

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

+++
weather proof

Material



Tread: cast polyurethane, 85 ± 2 Shore A crowned - soft
Core: Die-cast aluminium alloy

Material Fork



Finish: electro-zinc plated, hardened steel balls, double ball race
swivel head – pressed steel sheet, with strong Kingpin bolted and
locked – adjustable, thermoplastic dust protection ring and seal,
wheel axle bolted, adjustable total lock – leading or trailing
available

Advantages


- ✓ crowned soft tread makes it very economic
- ✓ very silent in motion
- ✓ very low rolling resistance
- ✓ very revving
- ✓ high abrasion and tear resistance
- ✓ good chemical resistance

Applications

- Metal-Technology
- Trash container trucks
- Workshops
- Dye trucks
- Dollies
- Carpentry
- Building-Industry



SWIVEL CASTOR

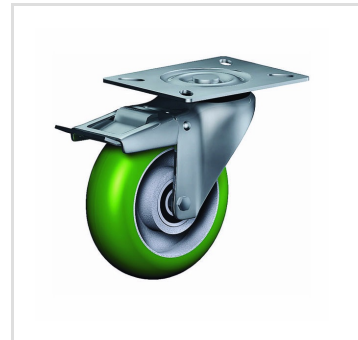

SWIVEL CASTOR WITH TOTAL LOCK



FIXED CASTOR

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	OVERALL HEIGHT H MM	DIMENSION OF TOP PLATE TP MM	HOLE SPACING HS MM	HOLE-Ø HD MM	SWIVEL RADIUS SR MM	WHEEL BEARING	PRICE €
KS 125 TLSBAK	Swivel castor	125x50	450	173	135x110	105x80	10,5	118		157,44
KST 125 TLSBAK	Swivel castor with total lock	125x50	450	173	135x110	105x80	10,5	170		171,84
KSF 125 TLSBAK	Fixed castor	125x50	450	173	135x110	105x80	10,5			116,64
KS 150 TLSBAK	Swivel castor	150x50	450	207	135x110	105x80	12,5	140		157,44
KST 150 TLSBAK	Swivel castor with total lock	150x50	450	207	135x110	105x80	12,5	170		185,04
KSF 150 TLSBAK	Fixed castor	150x50	450	207	135x110	105x80	12,5			129,36
KD 200 TLSBAK	Swivel castor	200x50	450	249	135x110	105x80	12,5	167		184,80
KDT 200 TLSBAK	Swivel castor with total lock	200x50	450	249	135x110	105x80	12,5	170		216,96
KDF 200 TLSBAK	Fixed castor	200x50	450	249	135x110	105x80	12,5			154,68