


Wheels Series ELPG



 max 400 kg  -10 °C - +60 °C  125-200 mm

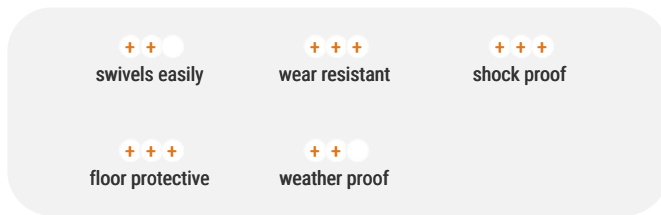

Material

Elastic solid rubber tyre 70 ± 5 Shore A electrically conductive
volume resistance value $<10^4 \Omega$
High quality nylon wheel centre electrically conductive
volume resistance value $<10^4 \Omega$

Advantages

- ✓ electrically conductive
- ✓ excellent running performance
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ korrosionsbeständig
- ✓ non-marking

Applications

- Bins
- Refuse bins
- Trash containers
- Refuse containers

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	HUB WIDTH MM	FIXING LENGTH MM	WHEEL BEARING	BORE DIAMETER MM	PRICE €
125 ELPGB 15	Wheel	125x40	225	45	45		15	67,08
160 ELP GK 20	Wheel	160x45	300	61	61		20	100,56
200 ELP GK 20	Wheel	200x50	400	61	61		20	131,76