

Wheels Series PS



max 600 kg -30 °C - +80 °C 100-200 mm


swivels easily

wear resistant

shock proof

floor protective

weather proof

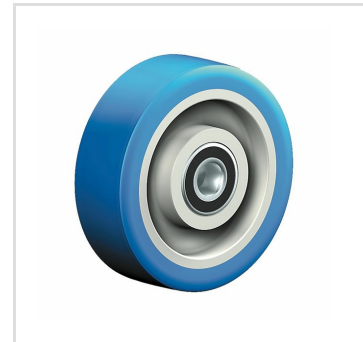

Material

Cast soft polyurethane coating,
87±3 Shore A
High quality nylon wheel centre

Advantages

- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ easy to clean
- ✓ good chemical resistance

Applications

- Fork-lifts

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	BAND THICKNESS MM	HUB WIDTH MM	FIXING LENGTH MM	WHEEL BEARING	BORE DIAMETER MM	PRICE €
100 PSK 15	Wheel	100x40	250	10	40	38		15	44,16
100 PSBX 15	Wheel	100x40	250	10	40	40		15	40,44
100 PSB 15	Wheel	100x40	250	10	40	40		15	36,84
125 PSK 15	Wheel	125x40	300	12,5	40	38		15	54,00
125 PSBX 15	Wheel	125x40	300	12,5	40	40		15	50,64
125 PSB 15	Wheel	125x40	300	12,5	40	40		15	47,16
150 PSK 15	Wheel	150x40	400	12,5	50	48		15	65,76
200 PSK 20	Wheel	200x50	600	12,5	60	54		20	105,96
200 PSBX 20	Wheel	200x50	600	12,5	60	60		20	103,80
200 PSB 20	Wheel	200x50	600	12,5	60	60		20	96,72