


Wheels - Pneumatic Wheels Series PU TYP C



 max 200 kg  -10 °C - +40 °C  260-400 mm

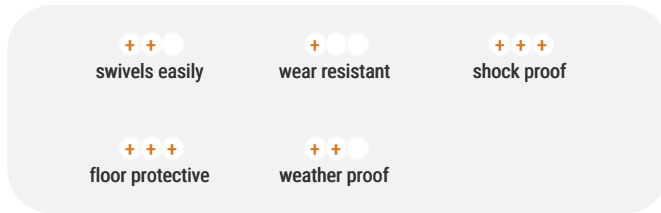

TYPE C

Material

Tread: black Polyurethane
Revited steel rim, zinc-plated

Advantages

- ✓ puncture-proof
- ✓ non-marking
- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion resistance
- ✓ good chemical resistance

Applications

- Health-Professionals

Dimensions

ARTICLE NUMBER	ARTICEL TYPE	WHEEL-Ø A X WIDTH B MM	LOAD CAPACITY KG	HUB WIDTH MM	FIXING LENGTH MM	WHEEL BEARING	BORE DIAMETER MM	PRICE €
260 PUK 20	Wheel	260x85	150	50	50		20	78,72
260 PUK 25	Wheel	260x85	150	50	50		25	70,92
260 KB 20	Wheel	260x85	160	75	75		20	112,20
400 PUK 25	Wheel	400x100	200	75	75		25	132,48
400 PUK 30	Wheel	400x100	200	75	75		30	136,32