


## additional articles Series ABWEISRAD Typ A



max -20 °C - +60 °C 100-150 mm

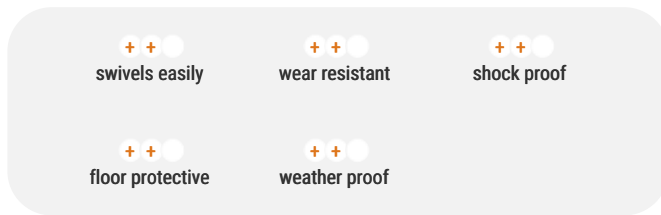

TYPE A

### Material

Outer jacket: Non-Marking Rubber  
Inner core: Nylon, grey

### Advantages

- ✓ impact proof
- ✓ high abrasion resistance
- ✓ easy to clean
- ✓ high chemical resistance

### Applications

- Metal-Technology
- Workshops
- Carpentry

## Dimensions

| ARTICLE NUMBER       | ARTICEL TYPE    | WHEEL-Ø A X WIDTH B MM | WHEEL TYPE | INNER CORE | OUTER CORE | HUB WIDTH MM | BORE DIAMETER MM | COLOUR | PRICE € |
|----------------------|-----------------|------------------------|------------|------------|------------|--------------|------------------|--------|---------|
| Abweisrad G 100/32,5 | Deflector Wheel | 100x12                 | B          | PA 6       | Gummi      | 24           | 32,5             | grey   | 15,12   |
| Abweisrad G 100/10,6 | Deflector Wheel | 100x14                 | A          | PA 6       | Gummi      | 24           | 10,6             | grey   | 15,12   |
| Abweisrad G 125/12,4 | Deflector Wheel | 125x10                 | B          | PA 6       | Gummi      | 12           | 12,4             | grey   | 28,32   |
| Abweisrad G 150/22,2 | Deflector Wheel | 150x11                 | B          | PA 6       | Gummi      | 20           | 22,2             | grey   | 27,36   |
| Abweisrad G 150/32,1 | Deflector Wheel | 150x11                 | B          | PA 6       | Gummi      | 24           | 32,1             | grey   | 27,36   |