

Swivel castor with total lock 312X PT



Stainless Steel Series 310XP - Wheel EL

-20 °C - +60 °C

- swivels easily
- wear resistant
- shock proof
- floor protective
- weather proof

Wheel



rubber tyre, electricallyconductive, volume resistance value <10⁴Ω

nylon rim, conductive, volume resistance value <10⁴Ω

Fork




Finish: Polished stainless steel, large double ball bearing – Ø 46 mm, bolted, wheel axle bolted and locked, adjustable total lock

Swivel castor with total lockWheel-Ø A x width B mm: 50x18	
Load Capacity kg:	40
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	75
Dimension of top plate TP mm:	60x60
Hole spacing HS mm:	40x40/46x46
Hole-Ø HD mm:	7
Swivel radius SR mm:	85
Wheel bearing:	Nylon plain bearing

Advantages

- ✓ electrically conductive
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

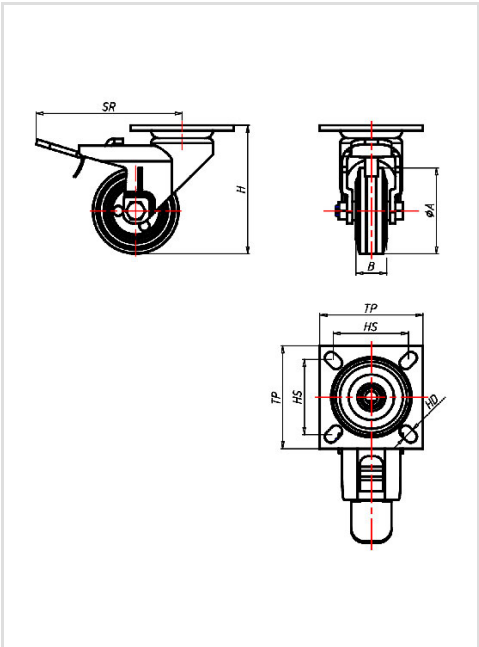

Applications

- Mechatronik
- Wet environments
- OP equipment
- Health-Professionals