

Swivel castor with total lock 312X PT

75 TPKX 

Stainless Steel Series 310XP - Wheel TP

-20 °C - +60 °C

- +++

swivels easily
- +++

wear resistant
- ++

shock proof
- +++

floor protective
- +++

weather proof

Wheel



Tread: Thermoplastic elastomer coating 95±3 Shore A**
High quality nylon wheel centre

Fork



Finish: Polished stainless steel, large double ball bearing – Ø 46 mm, bolted, wheel axle bolted and locked, adjustable total lock

Swivel castor with total lock Wheel-Ø A x width B mm: 75x25

Load Capacity kg: 45

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 103

Dimension of top plate TP 60x60 mm:

Hole spacing HS mm: 40x40/46x46

Hole-Ø HD mm: 7

Swivel radius SR mm: 85


Wheel bearing: Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high resistance to shocks
- ✓ non-marking
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

 ROLLENBAU

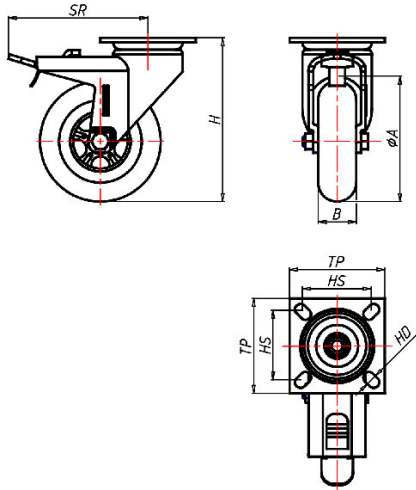

Applications

- Wet environments
- Health-Professionals