

# Swivel castor 315 PT 50 G

Institutional Series 315P - Wheel G

-20 °C - +60 °C

++  
swivels easily

++  
wear resistant

+  
shock proof

+++  
floor protective

++  
weather proof

## Wheel



Standard rubber tyre grey

Nylon rim

## Fork



Finish: zinc plated and chromate coated, large double ball bearing – Ø 46 mm, revited, dust protection ring, wheel axle bolted and locked, wheel-/total lock – spring stainless steel

Swivel castor	Wheel-Ø A x width B mm: 50x18
---------------	-------------------------------

Load Capacity kg:	40
-------------------	----

Load capacity tested according to EN 12530 and EN 12527	
---	--

Overall height H mm:	73
----------------------	----

Dimension of top plate TP mm:	58x58
-------------------------------	-------

Hole spacing HS mm:	40x40/42x42
---------------------	-------------


Hole-Ø HD mm:	6,2
---------------	-----

Swivel radius SR mm:	51
----------------------	----

Wheel bearing:	Nylon plain bearing
----------------	---------------------

## Advantages

- ✓ non-marking - floor protective
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

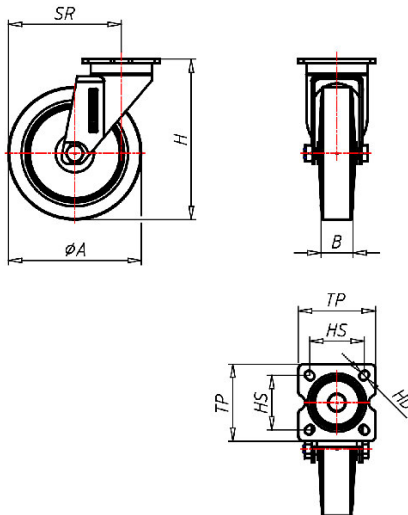

## Applications

- Portable bar units
- Metal-Technology
- Workshops
- Book carts
- Sidetables
- Laboratory equipment
- Instrument stands
- School furniture
- Carpentry
- Health-Professionals