

# Fixed castor 670 PT 50 EL

Institutional Series 315P - Wheel EL

-20 °C - +60 °C

++  
swivels easily

++  
wear resistant

+  
shock proof

++  
floor protective

++  
weather proof

## Wheel



rubber tyre, electricallyconductive, volume resistance value  $<10^4\Omega$

nylon rim, conductive, volume resistance value  $<10^4\Omega$

## Fork




Finish: zinc plated and chromate coated, large double ball bearing – Ø 46 mm, revited, dust protection ring, wheel axle bolted and locked, wheel-/total lock – spring stainless steel

Fixed castor	Wheel-Ø A x width B mm: 50x18
Load Capacity kg:	40
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	73
Dimension of top plate TP mm:	58x58
Hole spacing HS mm:	40x40/42x42
Hole-Ø HD mm:	6,2
Wheel bearing:	Ball bearing

## Advantages

- ✓ electrically conductive
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

ROLLENBAU

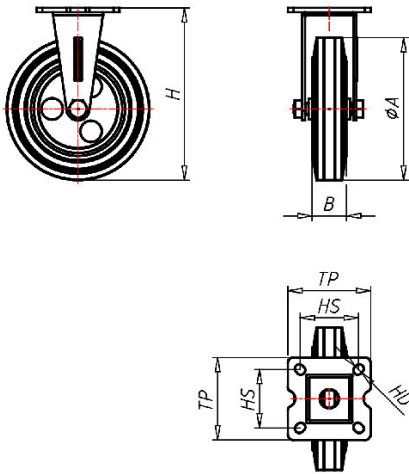

## Applications

- Portable bar units
- Metal-Technology
- Workshops
- Book carts
- Sidetables
- Laboratory equipment
- Instrument stands
- School furniture
- Carpentry
- Health-Professionals