

# Swivel castor with wheel brake 321

## PT 50 EL

Institutional Series 320P - Wheel EL

-20 °C - +60 °C

++

swivels easily

++

wear resistant

+

shock proof

++

floor protective

++

weather proof

Wheel



rubber tyre, electricallyconductive, volume resistance value <10<sup>4</sup>Ω

nylon rim, conductive, volume resistance value <10<sup>4</sup>Ω

Fork




Finish: zinc plated and chromate coated, large double ball bearing, revited, wheel axle bolted and locked, wheel-/total lock – spring stainless steel

Swivel castor with wheel brake	Wheel-Ø A x width B mm: 50x18+18
Load Capacity kg:	60
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	70
Dimension of top plate TP mm:	58x58
Hole spacing HS mm:	40x40/42x42
Hole-Ø HD mm:	6,2
Swivel radius SR mm:	78
Wheel bearing:	Ball bearing

Advantages

- ✔ electrically conductive
- ✔ silent in motion
- ✔ good running performance
- ✔ resistant to diluted acids

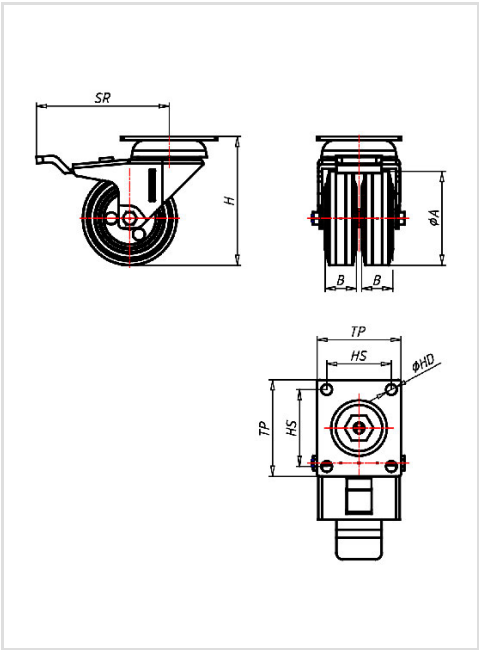

Applications

- Portable bar units
- Metal-Technology
- Workshops
- Book carts
- Laboratory equipment
- Room service carts
- Instrument stands
- School furniture
- Carpentry