

Swivel castor 330LX Z18 127 EL



STAINLESS STEEL
Stainless Steel Series 330LXZ - Wheel EL

-20 °C - +60 °C

+++
swivels easily

+++
wear resistant

++
shock proof

+++
floor protective

+++
weather proof

Wheel



rubber tyre, electricallyconductive, volume resistance value $<10^4\Omega$

nylon rim, conductive, volume resistance value $<10^4\Omega$

Fork




Stainless steel swivel fork with single bolt hole, large double ball bearing – $\varnothing 57$ mm, revited, wheel axle bolted and locked, total lock

Swivel castor	Wheel- \varnothing A x width B mm: 125x32
Load Capacity kg:	100
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	158
Stern mm:	18x62
Transverse bore mm:	M6 auf 3
Swivel radius SR mm:	103
Wheel bearing:	Nylon plain bearing

Advantages

- ✓ electrically conductive
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

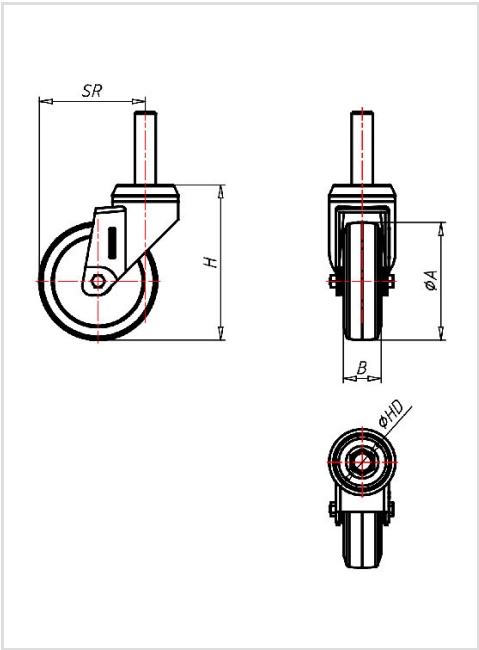

Applications

- Food & dish carts
- Food service carts
- Food & dish carts
- Food service carts
- Wet environments
- Health-Professionals