Product data sheet Swivel castor with wheel brake 541

⊙ | ROLLENBAU

Furniture Castors Series 540 GW - Wheel PUEL

M10 75 PUEL

-20 °C - +60 °C





+ +

wear resistant

Wheel

coated in polyurethane, 90±3 Shore Aelecrically conductive ${<}10^4\Omega$

+ +

shock proof

High quality nylon wheel centre


Zinc-die-cast housing - chrome plated Swivel bearing with combined plain-ball bearing Wheel brake - glass fibre reinforced Wheel axle revited

Swivel castor with wheel	Wheel-Ø A x width B mm: 75x13+13
brake	
Load Capacity kg:	60
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	93
Threat mm:	M10x15
Swivel radius SR mm:	88
Wheel bearing:	Nylon plain bearing

Advantages

- electrically conductive
- silent in motion
- Iow rolling resistance
- non-marking
- high resistance to shocks
- good chemical resistance
- ©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024



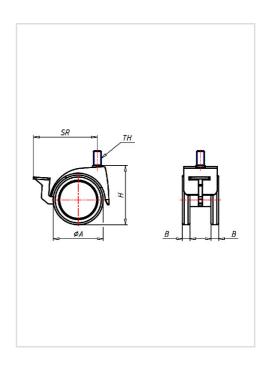

Applications

- Health-Professionals