

Wheel 150 AL-20

Wheels Series AL

 -30 °C - +80 °C


swivels easily


wear resistant


shock proof


floor protective


weather proof


Wheel

Coated in injected polyurethane, 58±3 Shore D

High quality nylon wheel centre



Wheel	Wheel-Ø A x width B mm: 150x40
Load Capacity kg:	350
Load capacity tested according to EN 12530 and EN 12527	
Band thickness mm:	5
Hub width mm:	50
Fixing length mm:	50
Wheel bearing:	Nylon plain bearing
Bore diameter mm:	20

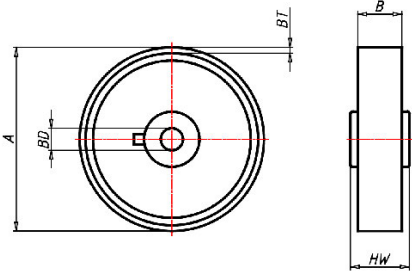

Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

Applications

- Fork-lifts