


Swivel castor CD 150 CGB

Transport Series CD - Wheel CG

 -20 °C - +60 °C


swivels easily


wear resistant


shock proof


floor protective


weather proof

Wheel



Elastic solid rubber tyre, grey, 75±5 Shore A

Reverted steel rim, zinc-plated

Fork




Finish: electro-zinc plated, double ball bearing – reverted, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 150x40
Load Capacity kg:	200
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	181
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	11
Swivel radius SR mm:	128
Wheel bearing:	Roller bearing

Advantages

- ✓ non-marking – floor protective
- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance

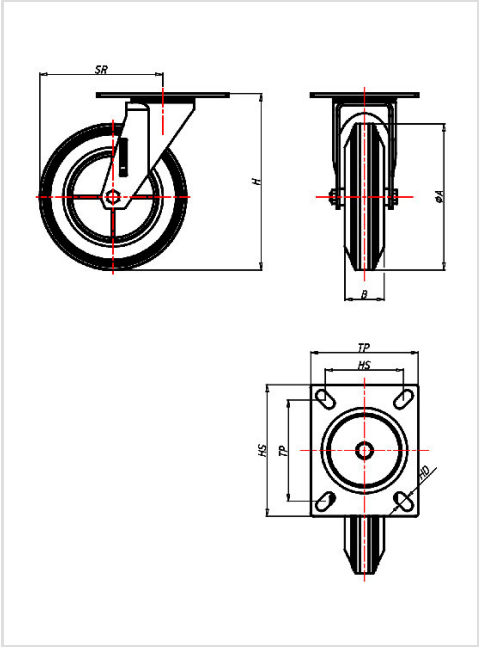

Applications

- Caddies
- Platform trucks
- Mobile tool racks
- Flight cases
- Bins
- Tow line trucks
- Tow-line trucks
- Chair dollies
- Table dollies
- Furniture dollies
- Refuse bins
- Delivery containers
- Diagnostic equipment
- Dollies
- Automobile test equipment
- Trash containers
- Refuse containers

