


Swivel castor CD 200 D

Transport Series CD - Wheel D

 -20 °C - +60 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel



Tread: standard rubber tyre black, 85±5 Shore A

Quality nylon wheel centre

Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 200x50
Load Capacity kg:	205
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	240
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	11
Swivel radius SR mm:	161
Wheel bearing:	Nylon plain bearing

Advantages

- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

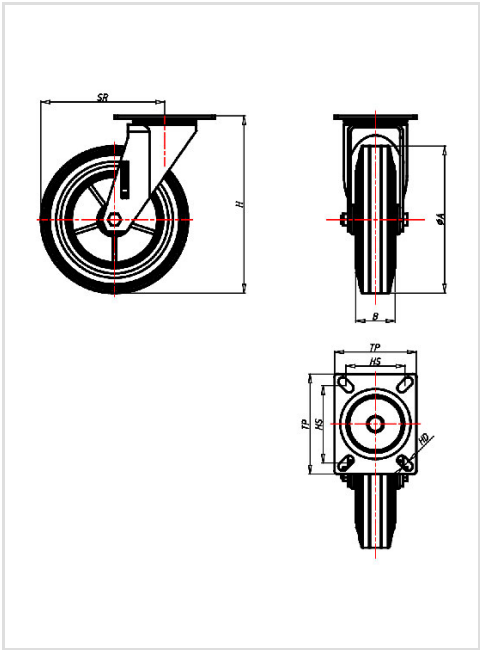

Applications

- Platform trucks
- Bins
- Tow line trucks
- Tow-line trucks
- Chair dollies
- Table dollies
- Refuse bins
- Delivery containers
- Diagnostic equipment
- Dollies
- Automobile test equipment
- Trash containers
- Refuse containers