Fixed castor CDF 125 EGBAK

Transport Series CD - Wheel EGBA

-30 °C - +80 °C



Wheel



SUPER-Elastic solid rubber tyre black 55 \pm 3 Shore A soft, crowned treat

Core in die-cast aluminium alloy

Fork



Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock


Fixed castor	Wheel-⊘ A x width B mm: 125X40
Load Capacity kg:	200
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	154
Dimension of top plate TP	102X83
mm:	
Hole spacing HS mm:	80X60
Hole-Ø HD mm:	9
Wheel bearing:	Ball bearing

Advantages

- very silent in motion
- very low rolling resistance
- good abrasion resistance
- corrosion resistant
- $\ensuremath{\,\overline{\,\,}}$ alternative to pneumatic tires
- non-marking





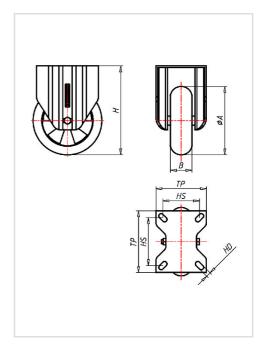

Applications

- Platform trucks
- Bins
- Tow line trucks
- Tow-line trucks
- Chair dollies
- Table dollies
- Refuse bins
- Dollies
- Trash containers
- Refuse containers

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024