
# Product data sheet Fixed castor CDF 180 DB

Transport Series CD - Wheel D

## -20 °C - +60 °C



### Wheel



Tread: standard rubber tyre black, 85±5 Shore A



Quality nylon wheel centre

#### Fork



Finish: electro-zinc plated, double ball bearing - revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

| Fixed castor  | Wheel- $\oslash$ A x width B mm: 180x45 |
|---|---|
| Load Capacity kg:                                       | 170                                     |
| Load capacity tested according to EN 12530 and EN 12527 |   |
| Overall height H mm:                                    | 218                                     |
| Dimension of top plate TP                               | 135x110                                 |
| mm:   |   |
| Hole spacing HS mm:                                     | 105x80                                  |
| Hole-Ø HD mm:   | 11                                      |
| Wheel bearing:  | Roller bearing                          |

#### Advantages


- silent in motion
- good running performance
- resistant to diluted acids

## Applications

- Platform trucks
- Bins
- Tow line trucks
- Tow-line trucks
- Chair dollies
- Table dollies
- Refuse bins
- Delivery containers
- Diagnostic equipment
- Dollies
- Automobile test equipment
- Trash containers
- Refuse containers

# <mark>⊙ | ROLLENB</mark>AU



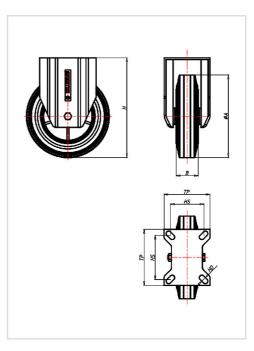

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024