

# Swivel castor with total lock CDT 200

ELK

Transport Series CD - Wheel EL

-20 °C - +60 °C

++

swivels easily

++

wear resistant

++

shock proof

++

floor protective

++

weather proof

Wheel



rubber tyre, electricallyconductive, volume resistance value <10<sup>4</sup>Ω  
bolted steel rim zinc plated, volume resistance value <10<sup>4</sup>Ω

Fork




Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls thermoplastic dust protection ring, wheel axle bolted, total lock

Swivel castor with total lockWheel-Ø A x width B mm: 200x50	
Load Capacity kg:	205
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	240
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	11
Swivel radius SR mm:	168
Wheel bearing:	Ball bearing

Advantages

- ✓ electrically conductive
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

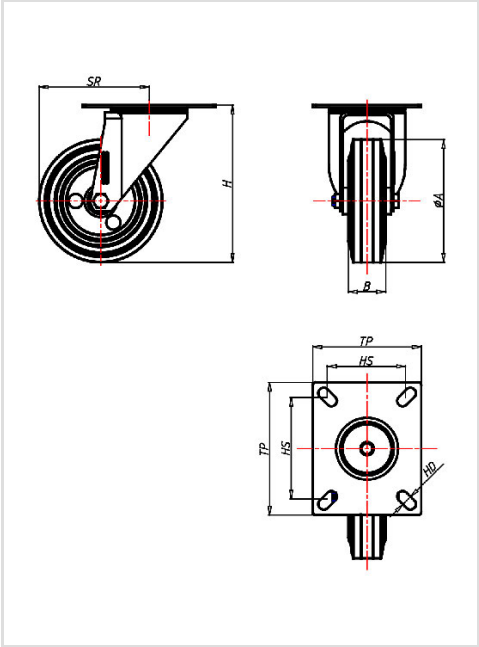

Applications

- Diagnostic equipment
- Automobile test equipment