

Wheel 160 CGK 10

Wheels Series CG

 -20 °C - +60 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel

Elastic solid rubber tyre, grey, 75±5 Shore A


Revited steel rim, zinc-plated

Wheel	Wheel-Ø A x width B mm: 160x40
Load Capacity kg:	210
Load capacity tested according to EN 12530 and EN 12527	
Hub width mm:	51
Fixing length mm:	51
Wheel bearing:	2 Ball bearings
Bore diameter mm:	10

Advantages

- ✓ non-marking – floor protective
- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

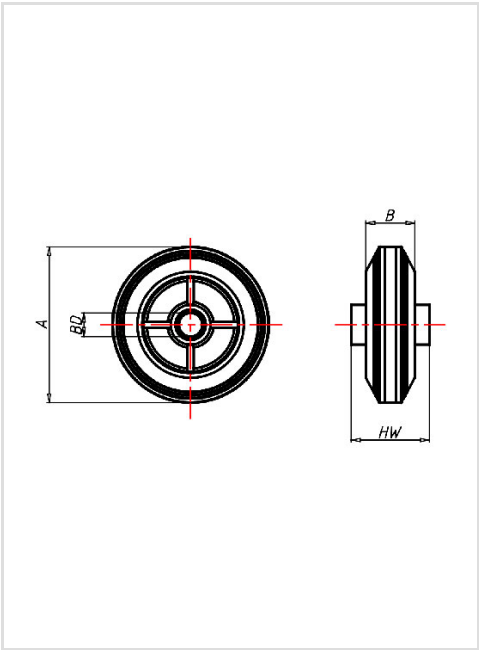

Applications

- Bins
- Refuse bins
- Trash containers
- Refuse containers