


Swivel castor CR 125 D

Transport Series CR - Wheel D

 -20 °C - +60 °C

++●

swivels easily

++●

wear resistant

++●

shock proof

++●

floor protective

++●

weather proof

Wheel



Tread: standard rubber tyre black, 85±5 Shore A

Quality nylon wheel centre

Fork




Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 125x38
Load Capacity kg:	90
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	154
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	104
Wheel bearing:	Nylon plain bearing

Advantages

- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

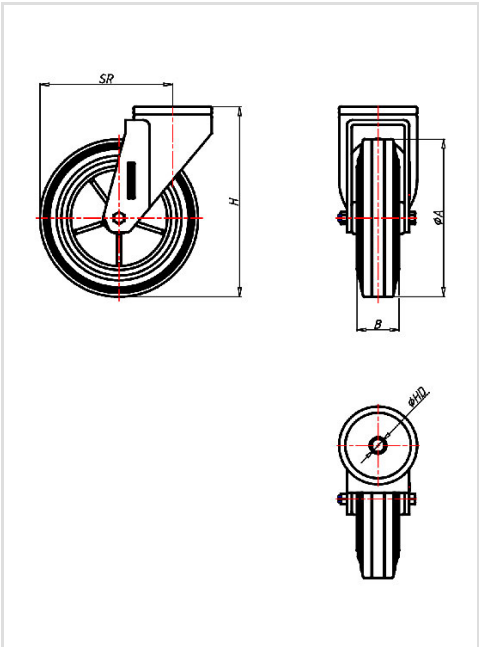

Applications

- Tyre racks
- Chair dollies
- Room service carts