


Swivel castor CR 150 DGB

Transport Series CR - Wheel DG

 -20 °C - +60 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel



Elastic solid rubber tyre, grey, 75±5 Shore A

Quality nylon wheel centre, black

Fork




Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 150x40
Load Capacity kg:	150
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	181
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	128
Wheel bearing:	Roller bearing

Advantages

- ✓ non-marking – floor protective
- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

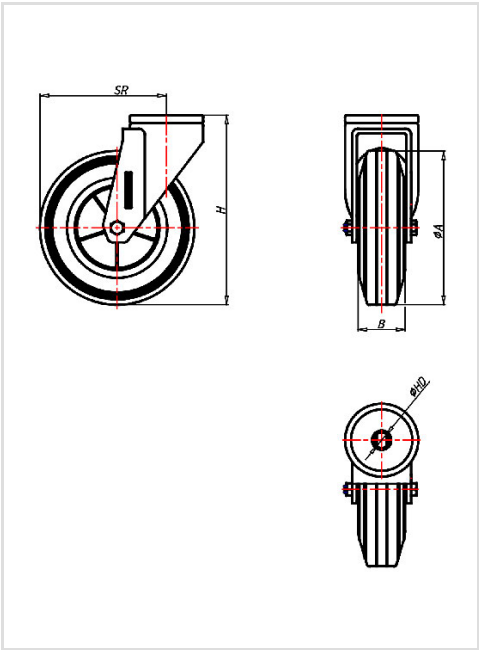

Applications

- Tyre racks
- Chair dollies
- Room service carts