


Swivel castor CR 200 LSB

Transport Series CR - Wheel L Typ C

 -20 °C - +40 °C

++

swivels easily

+

wear resistant

++

shock proof

+++

floor protective

++

weather proof

Wheel



Tread: black rubber
Revited steel rim, zinc-plated

Fork




Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 200x50
Load Capacity kg:	75
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	240
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	159
Wheel bearing:	Roller bearing

Advantages

- ✓ excellent anti shock absorption
- ✓ very low rolling resistance
- ✓ very silent in motion
- ✓ high running performance

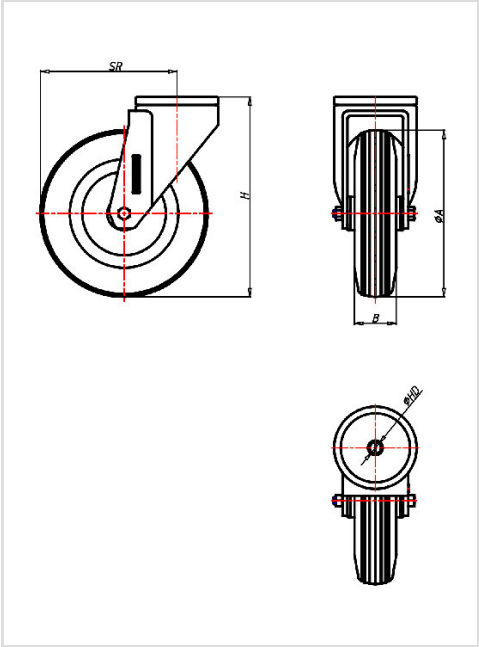

Applications

- Laundry trucks
- Tyre racks
- Mobile tool racks
- Chair dollies
- Furniture dollies
- Room service carts