


Swivel castor CR 80 PB

Transport Series CR - Wheel P

 -30 °C - +80 °C


swivels easily


wear resistant


shock proof


floor protective


weather proof

Wheel



Casted high quality nylon wheel

Fork




Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 80x30
Load Capacity kg:	120
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	106
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	75
Wheel bearing:	Roller bearing

Advantages

- ✓ easy running on smooth floors
- ✓ impact proof
- ✓ high abrasion resistance
- ✓ easy to clean
- ✓ high chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

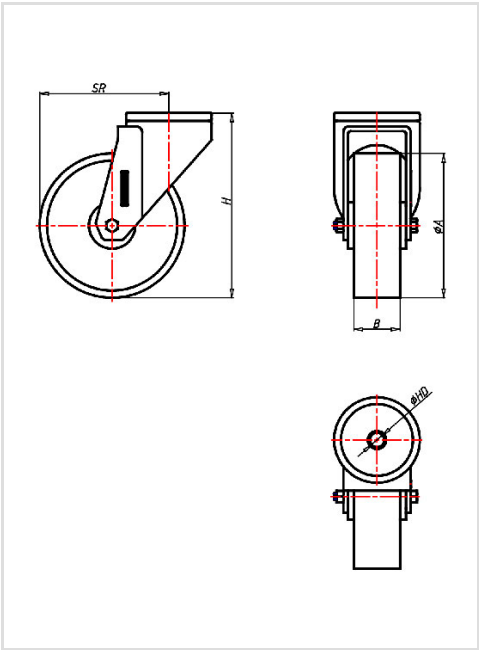

Applications

- Metal-Technology
- Tyre racks
- Workshops
- Carpentry
- Building-Industry