


Swivel castor with total lock CRT 150 AL

Transport Series CR - Wheel AL


 -30 °C - +80 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel

Coated in injected polyurethane, 58±3 Shore D

High quality nylon wheel centre

Fork



Medium duty bolt hole castor, finish: electro-zinc plated and yellow passivated, swivel fork with single bolt hole, double ball bearing – revited, hardened steel balls, wheel axle bolted, total lock

Swivel castor with total lock Wheel-Ø A x width B mm: 150x40

Load Capacity kg: 200

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 181

Hole-Ø HD mm: 12,5

Swivel radius SR mm: 140


Wheel bearing: Nylon plain bearing

Advantages

- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ easy to clean
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

 ROLLENBAU

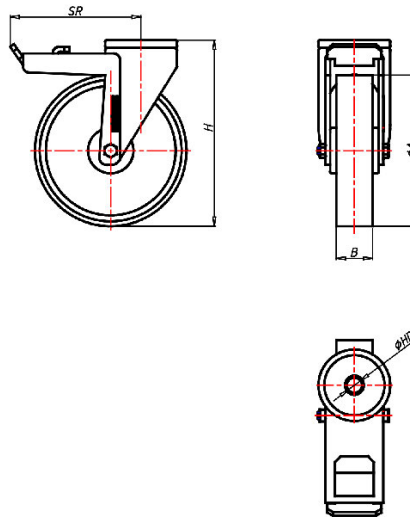

Applications

- Metal-Technology
- Tyre racks
- Workshops
- Carpentry
- Building-Industry