

Swivel castor CRH 80 FS

Heat Series CRH - Wheel FS



-40 °C - +270 °C

swivels easily

wear resistant

shock proof

floor protective

weather proof




Wheel

Wheel made of special thermo resistant compound

Fork

Finish: electro-zinc plated, double ball bearing – revited, hardened steel balls, high melting point grease, wheel axle bolted

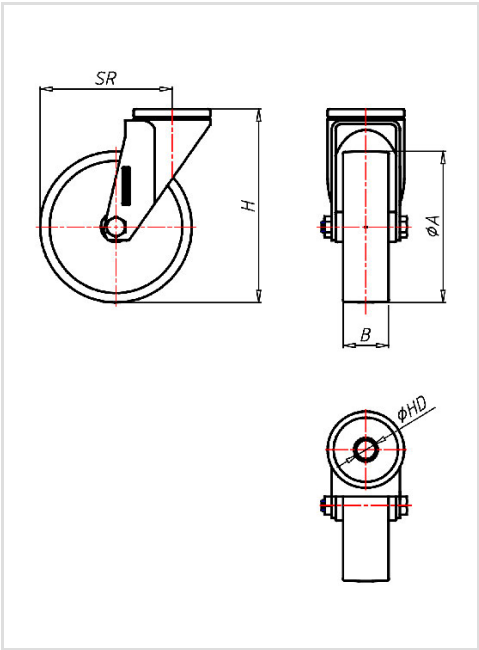

Swivel castor	Wheel-Ø A x width B mm: 80x30
Load Capacity kg:	150
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	106
Hole-Ø HD mm:	12,5
Swivel radius SR mm:	75
Wheel bearing:	Plain bearing

Advantages

Applications

– Bread racks