

# Swivel castor ED 175 TLK

Extra Heavy Duty Series ED - Wheel TL

-30 °C - +80 °C

+++  
swivels easily

+++  
wear resistant

+++  
shock proof

+++  
floor protective

+++  
weather proof

## Wheel



Tread: cast polyurethane, 95±3 Shore A

Core: De-cast aluminium alloy

## Fork




For applications where a super strong and durable caster is required,  
one tapered roller and one axial ball bearing,  
dust protection ring,  
very strong integrated Kingpin,  
locked nut, grease nipple, wheel axle bolted,  
finish – painted

|                                                         |                                |
|---------------------------------------------------------|--------------------------------|
| Swivel castor                                           | Wheel-Ø A x width B mm: 175x40 |
| Load Capacity kg:                                       | 550                            |
| Load capacity tested according to EN 12530 and EN 12527 |                                |
| Overall height H mm:                                    | 239                            |
| Dimension of top plate TP mm:                           | 135x110                        |
| Hole spacing HS mm:                                     | 105x80                         |
| Hole-Ø HD mm:                                           | 13                             |
| Swivel radius SR mm:                                    | 159                            |
| Wheel bearing:                                          | Ball bearing                   |

## Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

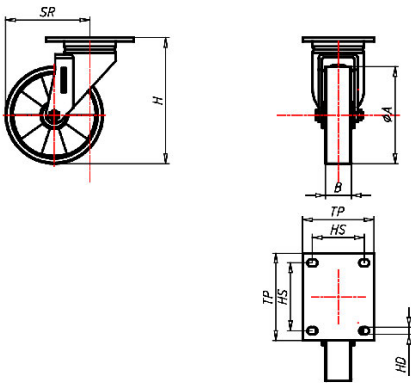

## Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry
- Carpentry