

# Swivel castor EDD 230 EEK

Extra Heavy Duty Series EDD - Wheel E

-30 °C - +80 °C

+++  
swivels easily

++  
wear resistant

+++  
shock proof

+++  
floor protective

++  
weather proof

## Wheel



Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre

Wheel centre: Die-cast aluminium alloy

## Fork



For applications where a super strong and durable caster is required,  
one tapered roller and one axial ball bearing,  
dust protection ring,  
very strong integrated Kingpin,  
locked nut, grease nipple, wheel axle bolted,  
finish – painted


Swivel castor	Wheel-Ø A x width B mm: 230x50+50
Load Capacity kg:	1000
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	313
Dimension of top plate TP mm:	255x205
Hole spacing HS mm:	210x160
Hole-Ø HD mm:	17
Swivel radius SR mm:	203
Wheel bearing:	Ball bearing

## Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking in grey

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

ROLLENBAU

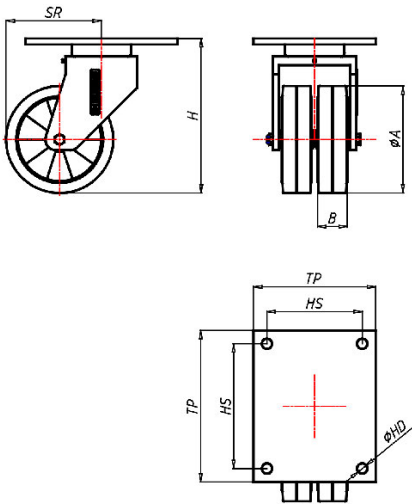

## Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry