

Swivel castor EDD 250 EEK

Extra Heavy Duty Series EDD - Wheel E

-30 °C - +80 °C

+++
swivels easily

++
wear resistant

+++
shock proof

+++
floor protective

++
weather proof

Wheel



Tread: Elastic solid rubber tyre, black, 73±5 Shore A, vulcanised on wheel centre

Wheel centre: Die-cast aluminium alloy

Fork



For applications where a super strong and durable caster is required,
one tapered roller and one axial ball bearing,
dust protection ring,
very strong integrated Kingpin,
locked nut, grease nipple, wheel axle bolted,
finish – painted


Swivel castor	Wheel-Ø A x width B mm: 250x60+60
Load Capacity kg:	1200
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	323
Dimension of top plate TP mm:	255x205
Hole spacing HS mm:	210x160
Hole-Ø HD mm:	17
Swivel radius SR mm:	216
Wheel bearing:	Ball bearing

Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking in grey

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 20.05.2024

ROLLENBAU

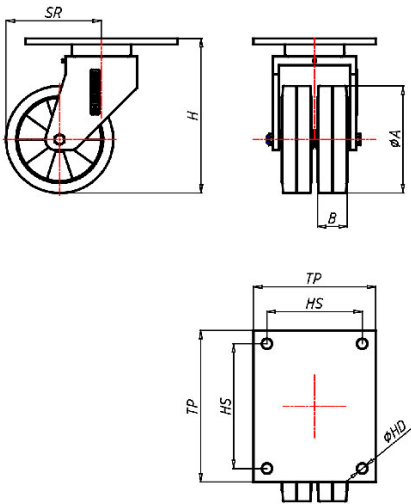

Applications

- Metal-Technology
- Heavy duty dollies
- Trash container trucks
- Machinery moving dollies
- Workshops
- Racks
- Building-Industry