

Swivel castor with total lock IPST 125



Stainless Steel Series IP - Wheel RN

-20 °C - +70 °C

- +++

swivels easily
- +++

wear resistant
- +++

shock proof
- +++

floor protective
- +++

weather proof

Wheel



Elastic solid rubber tyre, blue, 73±5 Shore A, vulcanised on wheel centre

High quality nylon wheel centre, black

Fork




Finish: Polished stainless steel swivel fork AISI 304, stainless steel Kingpin AISI 303 riveted to the top plate, stainless steel balls AISI 420, thermoplastic dust seal (water proof), self-locking stainless steel nut, adjustable total lock

Swivel castor with total lockWheel-Ø A x width B mm: 125x40	
Load Capacity kg:	180
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	162
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	11
Swivel radius SR mm:	170
Wheel bearing:	Roller bearing

Advantages

- ✓ excellent running performance
- ✓ very silent in motion
- ✓ low rolling resistance
- ✓ good abrasion resistance
- ✓ corrosion resistant
- ✓ non-marking

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

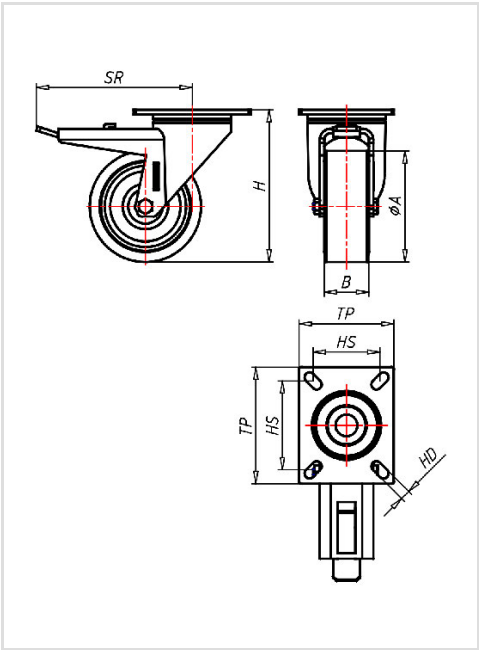

Applications

- Wet environments
- Dollies