

Swivel castor with total lock IPT 125



STAINLESS STEEL
Stainless Steel Series IP - Wheel P

-30 °C - +80 °C

- +++

swivels easily
- +++

wear resistant
- +++

shock proof
- ++●

floor protective
- +++

weather proof

Wheel



Casted high quality nylon wheel

Fork




Finish: Polished stainless steel swivel fork AISI 304, stainless steel Kingpin AISI 303 riveted to the top plate, stainless steel balls AISI 420, thermoplastic dust seal (water proof), self-locking stainless steel nut, adjustable total lock

Swivel castor with total lockWheel-Ø A x width B mm: 125x40	
Load Capacity kg:	300
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	162
Dimension of top plate TP mm:	105x85
Hole spacing HS mm:	80x60
Hole-Ø HD mm:	9
Swivel radius SR mm:	140
Wheel bearing:	Nylon plain bearing

Advantages

- ✓ easy running on smooth floors
- ✓ impact proof
- ✓ high abrasion resistance
- ✓ easy to clean
- ✓ high chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

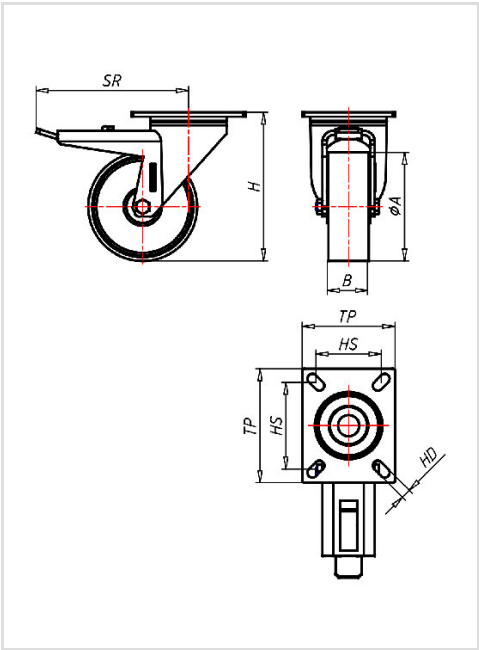

Applications

- Mechatronik
- Wet environments
- Dollies