

Swivel castor with total lock KDT 125 TLB

Transport Series KD - Wheel TL

-30 °C - +80 °C

+++
swivels easily

+++
wear resistant

+++
shock proof

+++
floor protective

++
weather proof

Wheel



Tread: cast polyurethane, 95±3 Shore A

Core: De-cast aluminium alloy

Fork



Finish: electro-zinc plated, hardened steel balls, double ball race swivel head – pressed steel sheet, with strong Kingpin bolted and locked – adjustable, thermoplastic dust protection ring and seal, wheel axle bolted, adjustable total lock – leading or trailing available

Swivel castor with total lock Wheel-Ø A x width B mm: 125x30

Load Capacity kg: 250

Load capacity tested according to EN 12530 and EN 12527

Overall height H mm: 163

Dimension of top plate TP 135x110 mm:

Hole spacing HS mm: 105x80

Hole-Ø HD mm: 10,5

Swivel radius SR mm: 140


Wheel bearing: Roller bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

ROLLENBAU

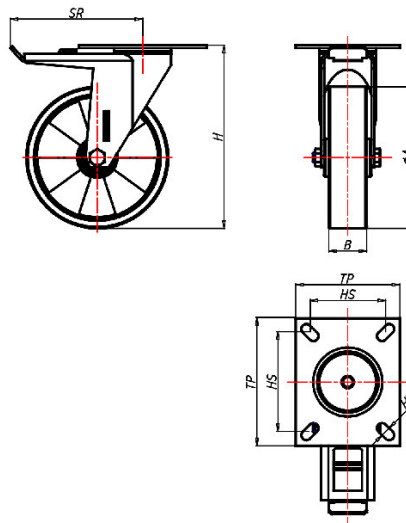

Applications

- Metal-Technology
- Trash container trucks
- Workshops
- Dye trucks
- Dollies
- Carpentry
- Building-Industry