

Swivel castor MFA 125 ZK

Spring-loaded Castors Series MFA - Wheel Z

-30 °C - +80 °C

++
swivels easily

++
wear resistant

+++
shock proof

+++
floor protective

++
weather proof

Wheel



Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted

Fork




Medium duty spring castors Finish: black painted,
Polyurethane buffer spring, double ball bearing, equaliser
swinging on bronze bushes

Swivel castor	Wheel-Ø A x width B mm: 125x30
Load Capacity kg:	200
Load capacity tested according to EN 12530 and EN 12527	
Preload force daN:	90
max.spring travel mm:	25
Overall height H mm:	207
Dimension of top plate TP mm:	105x85
Hole spacing HS mm:	80x60
Hole-Ø HD mm:	11
Swivel radius SR mm:	96
Wheel bearing:	Ball bearing

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

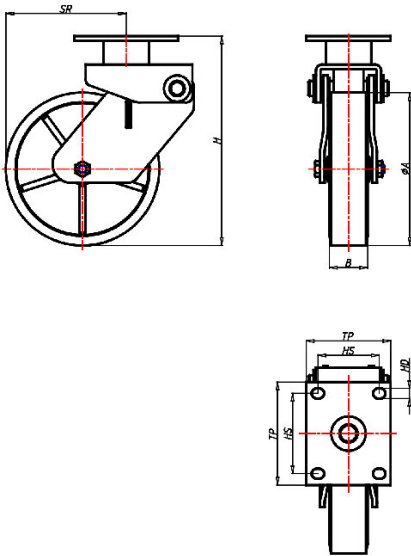

Applications

- Decoration carts
- Stage equipment