

Rail Wheel 150 SFHK 20

Rail wheels Series SFH

 -30 °C - +60 °C

++●

swivels easily

+++

wear resistant

+++

shock proof

++●

floor protective

++●


weather proof



Wheel

Tread: Vulkollan® 92±3 Shore A, 115° C heat resistant for limited use

Wheel centre - steel BS 3100

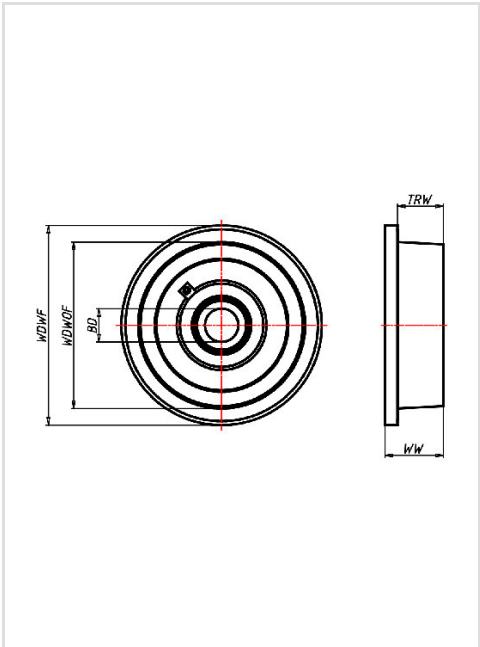

Rail Wheel	
Wheel-Ø without flange mm:	150
Wheel-Ø with flange mm:	190
Tread width mm:	50
Wheel width mm:	62
Load Capacity kg:	900
Load capacity tested according to EN 12530 and EN 12527	
Hub width mm:	62
Wheel bearing:	Ball bearing
Bore diameter mm:	20

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ high chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 03.06.2024

Applications

- Building-Industry