

Guide Roller 50x15 WUDPK 8

Guide Rollers Series WUDPK



-20 °C - +80 °C


swivels easily

wear resistant

shock proof


floor protective

weather proof

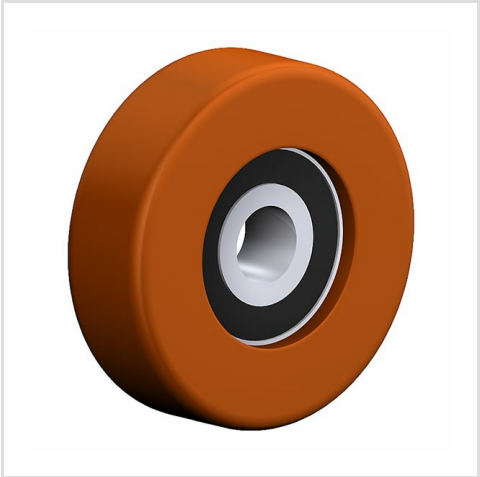

Wheel

Precision ball bearing moulded with Vulkopan 59 Shore D*
Type X: plane tread • Type Y: tread edges rounded • Type Z:
crowned tread

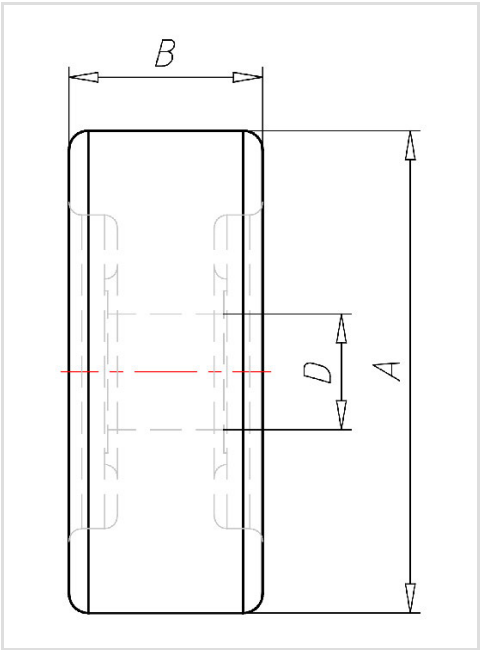

Guide Roller	Wheel-Ø A x width B mm: 50x15
Load Capacity kg:	80
Load capacity tested according to EN 12530 and EN 12527	
Type:	Z
Fixing length mm:	7
Wheel bearing:	1 Ball bearing 608 ZZ
Bore diameter mm:	8

Advantages

- ✓ long service life
- ✓ excellent wear resistance
- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.06.2024

Applications

- Haulage way
- Assembly lines
- Mechatronik