

Swivel castor XD 200 ELBX



Stainless Steel Series XD - Wheel EL

-20 °C - +60 °C

swivels easily

wear resistant

shock proof

floor protective

weather proof

Wheel



rubber tyre, electricallyconductive, volume resistance value $<10^4\Omega$

bolte stainless steel rim, volume resistance value $<10^4\Omega$

Fork




Finish: Polished stainless steel swivel fork AISI 304, stainless steel balls AISI 420, double ball bearing – revited, with dust protection ring, wheel axle bolted, total lock

Swivel castor	Wheel-Ø A x width B mm: 200x50
Load Capacity kg:	205
Load capacity tested according to EN 12530 and EN 12527	
Overall height H mm:	240
Dimension of top plate TP mm:	135x110
Hole spacing HS mm:	105x80
Hole-Ø HD mm:	11
Swivel radius SR mm:	161
Wheel bearing:	Roller bearing

Advantages

- ✓ electrically conductive
- ✓ silent in motion
- ✓ good running performance
- ✓ resistant to diluted acids

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

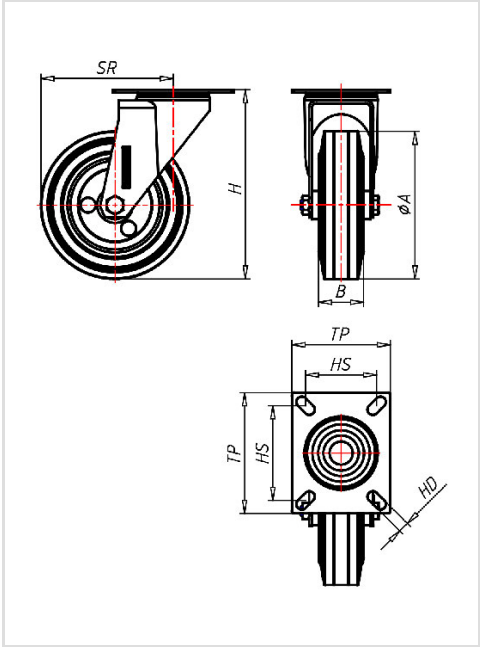

Applications

- Wet environments
- Dollies