

Wheel 100 LZK 17

Forklift wheels Series Z

 -30 °C - +80 °C

 **swivels easily**

 **wear resistant**

 **shock proof**

 **floor protective**

 **weather proof**

Wheel

Tread: Cast polyurethane, 95±3 Shore A

Wheel centre, Cast-iron - painted



Wheel	Wheel-Ø A x width B mm: 100x30
Load Capacity kg:	300
Load capacity tested according to EN 12530 and EN 12527	
Band thickness mm:	8
Hub width mm:	30
Fixing length mm:	28
Wheel bearing:	2 Ball bearings 6003 ZZ
Bore diameter mm:	17

Advantages

- ✓ silent in motion
- ✓ low rolling resistance
- ✓ high abrasion and tear resistance
- ✓ high resistance to shocks
- ✓ good chemical resistance

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 01.06.2024

 **ROLLENBAU**

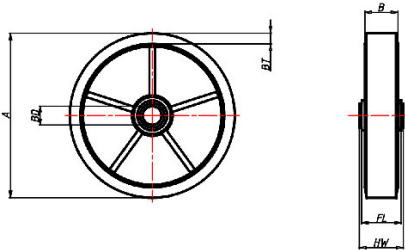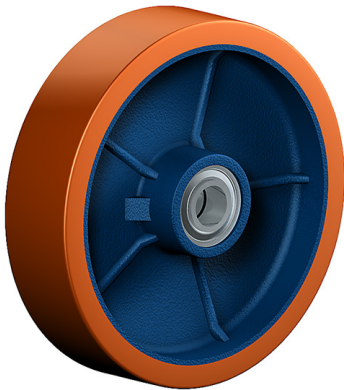

Applications

- Fork-lifts