

Ball Transfer Unit A1022-15

Ball Units Series A-Flange

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

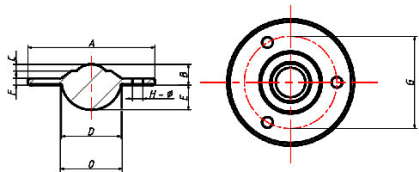

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel

Housing, zinc-plated or stainless steel



Ball Transfer Unit

Ball-Ø mm: 32

Finish housing: stainless steel

Finish Balls: stainless steel

Load Capacity up kg: 125

Load Capacity down kg: 55

A mm: 73,7

B mm: 16,2

C mm: 8,0

D mm: 45,5

E mm: 19,9

F mm: 4,2

G mm: 58,7

H mm: 5,1

O mm: 46,0

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt

Applications

- Haulage way
- Assembly lines
- Mechatronik