

Ball Transfer Unit A2011-13

Ball Units Series A-Flange - Wheel DL

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

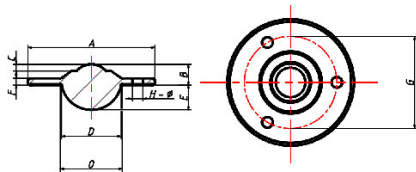

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel with sealing lip

Housing, zinc-plated or stainless steel



Ball Transfer Unit

Ball-Ø mm: 40

Finish housing: steel zinc plated

Finish Balls: carbon-steel

Load Capacity up kg: 140

Load Capacity down kg: 60

A mm: 89,0

B mm: 21,4

C mm: 8,7

D mm: 55,6

E mm: 24,6

F mm: 6,0

G mm: 70,0

H mm: 7,0

O mm: 56,0

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt
- ✓ Sealing lip

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 02.05.2024

Applications

- Haulage way
- Assembly lines
- Mechatronik