

Ball Transfer Unit A3006-14

Ball Units Series A-Flange - Wheel DL

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

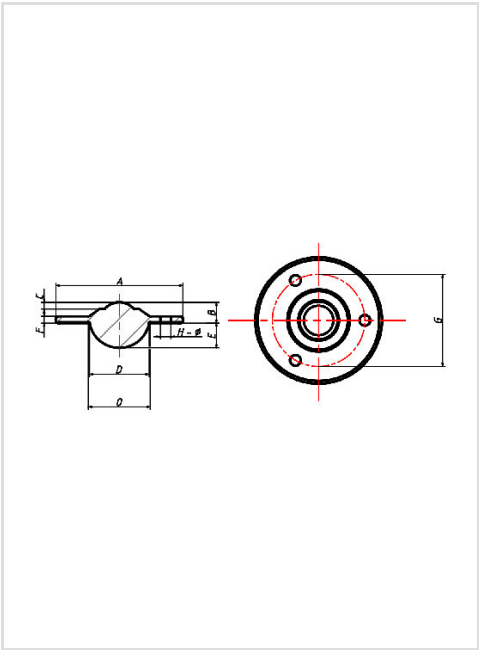

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel with sealing lip

Housing, zinc-plated or stainless steel



Ball Transfer Unit	
Ball-Ø mm:	19
Finish housing:	steel zinc plated
Finish Balls:	nylon ball
Load Capacity up kg:	20
Load Capacity down kg:	10
A mm:	61,0
B mm:	10,0
C mm:	3,2
D mm:	29,1
E mm:	12,0
F mm:	3,2
G mm:	44,5
H mm:	5,1
Ø mm:	29,5

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt
- ✓ Sealing lip

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 05.05.2024

Applications

- Haulage way
- Assembly lines
- Mechatronik