

Ball Transfer Unit A3016-13

Ball Units Series A-Flange

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

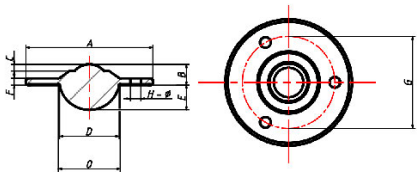

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel

Housing, zinc-plated or stainless steel



Ball Transfer Unit

Ball-Ø mm: 15

Finish housing: steel zinc plated

Finish Balls: carbon-steel

Load Capacity up kg: 12

Load Capacity down kg: 6

A mm: 41,3

B mm: 10,2

C mm: 4,0

D mm: 22,2

E mm: 8,3

F mm: 3,2

G mm: 30,0

H mm: 3,5

Ø mm: 23,0

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt

Applications

- Haulage way
- Assembly lines
- Mechatronik