

# Ball Transfer Unit A3016-14

Ball Units Series A-Flange

 -30 °C - +70 °C

  
swivels easily

  
wear resistant

  
shock proof


  
floor protective

  
weather proof

## Wheel

Ball: zinc-plated or nylon or stainless steel

Housing, zinc-plated or stainless steel

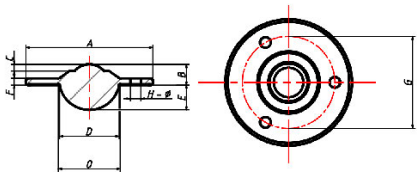

## Ball Transfer Unit

Ball-Ø mm: 15

Finish housing: steel zinc plated

Finish Balls: nylon ball

Load Capacity up kg: 8

Load Capacity down kg: 4

A mm: 41,3

B mm: 10,2

C mm: 4,0

D mm: 22,2

E mm: 8,3

F mm: 3,2

G mm: 30,0

H mm: 3,5

Ø mm: 23,0

## Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt

## Applications

- Haulage way
- Assembly lines
- Mechatronik