

Ball Transfer Unit A3025-13

Ball Units Series A-Flange

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

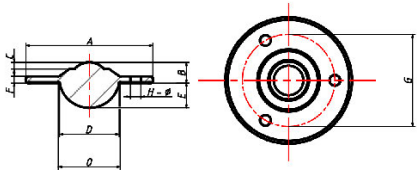

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel

Housing, zinc-plated or stainless steel



Ball Transfer Unit

Ball-Ø mm: 25

Finish housing: steel zinc plated

Finish Balls: carbon-steel

Load Capacity up kg: 55

Load Capacity down kg: 25

A mm: 56,0

B mm: 14,6

C mm: 7,3

D mm: 34,7

E mm: 14,6

F mm: 4,0

G mm: 45,5

H mm: 4,5

Ø mm: 35,0

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt

Applications

- Haulage way
- Assembly lines
- Mechatronik