

Ball Transfer Unit A4001-13

Ball Units Series A-Flange - Wheel DL

 -30 °C - +70 °C


swivels easily


wear resistant


shock proof

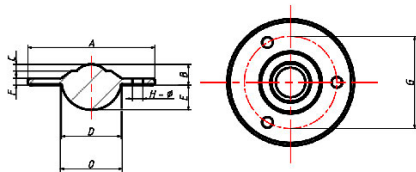

floor protective


weather proof

Wheel

Ball: zinc-plated or nylon or stainless steel with sealing lip

Housing, zinc-plated or stainless steel



Ball Transfer Unit

Ball-Ø mm: 50

Finish housing: steel zinc plated

Finish Balls: carbon-steel

Load Capacity up kg: 340

Load Capacity down kg: 100

A mm: 120,7

B mm: 28,3

C mm: 14,3

D mm: 75,3

E mm: 30,2

F mm: 6,3

G mm: 92,0

H mm: 8,0

Ø mm: 76,0

Advantages

- ✓ Low profile
- ✓ Several holes to let out dirt
- ✓ Sealing lip

©Copyright 2024 Rollenbau GmbH, www.rollenbau.at 04.05.2024

Applications

- Haulage way
- Assembly lines
- Mechatronik